

耐扭式电缆接头 (A型)

Flex Protecting Cable Glands (A-Type)



螺牙规格: 公制牙 (Metric), PC牙及G (PF) 牙
 产品材质: A,C,E,F部分采用特殊UL认可之尼龙制成, B及D部分采用标准EPDM户外耐候橡胶。(其他用途橡胶可接受定制)
 工作温度: 静态-40°C至100°C, 或瞬间可耐热至120°C; 动态-20°C至80°C, 或瞬间可耐热至100°C
 产品特性: 特殊A型设计的夹紧圈与夹紧爪, 夹紧电缆范围大, 其电缆固拉特强, 气密性完美, 并可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
 颜色种类: 黑色、灰色, 其它颜色可定做。

Thread: Metric, PG and G(PF) Materials: UL approved Nylon PA66(Flammability UL 94V-2) for A,C,E,F parts; EPDM rubber for B,D parts
 Protection degree: IP68 Working temperature: -40°C to 100°C
 Features: The claws and seals of excellent design. Sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency. Color: Black and gray (Special colors customizable)

| 夹紧圈形状 Seal Holes | 螺牙规格 Thread | 规格 Sizes | 适用电缆 Cable Range | 螺纹外径 Thread O.D.C1 | 机板孔径 Panel Mounting Hole | 螺纹长度 Thread Length C2 | 扳手径 Spanner Size A&I | 包装 Std. Pkg. pcs |
|---------------------|----------------|----------------|---------------------|-----------------------|-----------------------------|--------------------------|-------------------------|---------------------|
| 短 螺 纹 | M16X1.5 | MG16AS-P-05 | 5.3-3 | 16 | 16-16.3 | 10 | 22/19 | 10 |
| | | MG16AS-P-08 | 7.8-4.5 | 16 | 16-16.3 | 10 | 22/19 | 10 |
| | | MG16A-P-10-ST | 10-6 | 16 | 16-16.3 | 10 | 22/22 | 10 |
| | M20X1.5 | MG20AS-P-06 | 7-4 | 20 | 20-20.3 | 10 | 24/22 | 10 |
| | | MG20AS-P-10 | 10-6 | 20 | 20-20.3 | 10 | 24/22 | 10 |
| | | MG20A-P-10-ST | 11-7 | 20 | 20-20.3 | 10 | 27/27 | 10 |
| | M25X1.5 | MG20A-P-13-ST | 13-8 | 20 | 20-20.3 | 10 | 27/27 | 10 |
| | | MG20AL-P-15-ST | 14.7-11 | 20 | 20-20.3 | 10 | 27/33 | 10 |
| | | MG25AS-P-10 | 11-7 | 25 | 25-25.4 | 12 | 33/27 | 10 |
| | M32X1.5 | MG25AS-P-13 | 13-8 | 25 | 25-25.4 | 12 | 33/27 | 10 |
| | | MG25A-P-16-ST | 15.8-12 | 25 | 25-25.4 | 10 | 33/33 | 10 |
| | | MG32AS-P-16 | 15.8-12 | 32 | 32-32.4 | 12 | 41/33 | 10 |
| 长 螺 纹 | M12X1.5 | MG12A-P-05 | 5.3-3 | 12 | 12-12.3 | 9 | 18/19 | 10 |
| | | MG12A-P-08 | 7.8-4.5 | 12 | 12-12.3 | 9 | 18/19 | 10 |
| | | MG16A-P-06 | 7-4 | 16 | 16-16.3 | 15 | 22/22 | 10 |
| | M16X1.5 | MG16A-P-10 | 10-6 | 16 | 16-16.3 | 15 | 22/22 | 10 |
| | | MG20AM-P-08 | 8.8-5 | 20 | 20-20.3 | 15 | 24/24 | 10 |
| | | MG20A-P-10 | 11-7 | 20 | 20-20.3 | 15 | 27/27 | 10 |
| | M20X1.5 | MG20AM-P-11 | 11.5-7 | 20 | 20-20.3 | 15 | 24/24 | 10 |
| | | MG20A-P-13 | 13-8 | 20 | 20-20.3 | 15 | 27/27 | 10 |
| | | MG20AL-P-15 | 14.7-11 | 20 | 20-20.3 | 15 | 27/33 | 10 |
| | M25X1.5 | MG25A-P-16 | 15.8-12 | 25 | 25-25.4 | 15 | 33/33 | 10 |
| | | PGA7-P-05 | 5.3-3 | 12.5 | 12.5-12.8 | 8.5 | 17/19 | 10 |
| | | PGA7-P-08 | 7.8-4.5 | 12.5 | 12.5-12.8 | 8.5 | 17/19 | 10 |
| PG7 | PGA9-P-05 | 5.3-3 | 15.2 | 15.2-15.5 | 9 | 17/19 | 10 | |
| | PGA9-P-08 | 7.8-4.5 | 15.2 | 15.2-15.5 | 9 | 22/19 | 10 | |
| | PGA9L-P-09 | 9-5 | 15.2 | 15.2-15.5 | 10 | 22/22 | 10 | |
| PG9 | PGA11-P-06 | 7-4 | 18.6 | 18.6-18.9 | 10 | 24/22 | 10 | |
| | PGA11-P-10 | 10-6 | 18.6 | 18.6-18.9 | 10 | 24/22 | 10 | |
| | PGA11L-P-12 | 12-8 | 18.6 | 18.6-18.9 | 10 | 24/24 | 10 | |
| PG11 | PGA13.5-P-08 | 8.8-5 | 20.4 | 20.4-20.7 | 10 | 27/24 | 10 | |
| | PGA13.5-P-11 | 11.5-7 | 20.4 | 20.4-20.7 | 10 | 27/24 | 10 | |
| | PGA13.5L-P-13 | 13-10 | 20.4 | 20.4-20.7 | 10 | 27/27 | 10 | |
| PG13.5 | PGA16-P-10 | 11-7 | 22.5 | 22.5-22.8 | 11 | 30/27 | 10 | |
| | PGA16-P-13 | 13-8 | 22.5 | 22.5-22.8 | 11 | 30/27 | 10 | |
| | PGA16L-P-15 | 15-11 | 22.5 | 22.5-22.8 | 10 | 30/33 | 10 | |
| PG16 | PGA21-P-16 | 15.8-12 | 28.3 | 28.3-28.7 | 12.5 | 36/33 | 10 | |
| | PGA13-P-05 | 5.3-3 | 13.157 | 13.2-13.4 | 9 | 19/19 | 10 | |
| | PGA13-P-08 | 7.8-4.5 | 13.157 | 13.2-13.4 | 9 | 19/19 | 10 | |
| G(PF)1/4 | PGA17-P-06 | 7-4 | 16.662 | 16.7-16.9 | 10 | 22/22 | 10 | |
| | PGA17-P-10 | 10-6 | 16.662 | 16.7-16.9 | 10 | 22/22 | 10 | |
| | PGA21S-P-06 | 7-4 | 20.955 | 21-21.2 | 10 | 27/22 | 10 | |
| G(PF)3/8 | PGA21M-P-08 | 8.8-5 | 20.955 | 21-21.2 | 10 | 27/24 | 10 | |
| | PGA21S-P-10 | 10-6 | 20.955 | 21-21.2 | 10 | 27/22 | 10 | |
| | PGA21L-P-10 | 11-7 | 20.955 | 21-21.2 | 10 | 27/27 | 10 | |
| G(PF)1/2 | PGA21M-P-11 | 11.5-7 | 20.955 | 21-21.2 | 10 | 27/24 | 10 | |
| | PGA21L-P-13 | 13-8 | 20.955 | 21-21.2 | 10 | 27/27 | 10 | |
| | PGA21LL-P-15 | 15-11 | 20.955 | 21-21.2 | 10 | 30/33 | 10 | |
| G(PF)3/4 | PGA26S-P-10 | 11-7 | 26.441 | 26.5-26.8 | 12 | 33/27 | 10 | |
| | PGA26S-P-13 | 13-8 | 26.441 | 26.5-26.8 | 12 | 33/27 | 10 | |
| | PGA26-P-16 | 15.8-12 | 26.441 | 26.5-26.8 | 12.5 | 33/33 | 10 | |
| G(PF)1 | PGA33S-P-16 | 15.7-12 | 33.249 | 33.3-33.6 | 12 | 42/33 | 10 | |
| | NPA17S-P-06 | 7-4 | 17.055 | 17 | 13 | 22 | 10 | |
| | NPA17S-P-10 | 10-6 | 17.055 | 17 | 13 | 22 | 10 | |
| NPT 1/2 | NPA21-P-10 | 11-7 | 21.223 | 21 | 13 | 27 | 10 | |
| | NPA21-P-13 | 12-8 | 21.223 | 21 | 13 | 27 | 10 | |
| | NPA26-P-16 | 15.8-12 | 26.568 | 26.568 | 15 | 33 | 10 | |


JIS-船标 · 夹紧式

填料函

Cable gland



1. 可配多层密封圈以便更大范围满足电缆外径。
2. 可配凹型密封圈可更好的夹紧密封电缆。

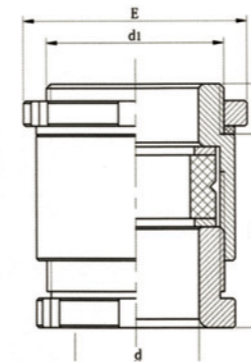

订购示例 (e.g.): JIS25

| | | | |
|----------------|---|------------------------------|------|
| 材质 Material | 黄铜、黄铜镀镍或不锈钢 (订货时请指明) Brass, brass nickel plated or stainless steel (When ordering, please specify) | | |
| 特点 Features | 适用于各种普通电缆 Applicable to all kinds of ordinary cable | | |
| 密封件 Seals | 丁腈橡胶(NBR) | 防护等级 Degree of protection | IP56 |
| 工作温度 COT | -40°C~100°C | | |



1. Can be equipped with multi-layer sealing ring in order to greater range to meet the outer diameter of cable
2. Can be equipped with concave sealing ring in order to better clamping sealing cable



单位:mm

| 规格型号 Gland size | D | d1 | H | H1 | E | 适用电缆外径 Cable size |
|--------------------|-----|--------|-----|----|-----|----------------------|
| JIS10 | 10 | G3/8 | 44 | 11 | 28 | 5-8 |
| JIS15 | 15 | G1/2 | 47 | 11 | 31 | 7-11 |
| JIS20 | 20 | G3/4 | 51 | 11 | 37 | 10-15 |
| JIS25 | 25 | G1 | 57 | 11 | 45 | 14-20 |
| JIS30 | 30 | G1 1/4 | 62 | 12 | 56 | 20-26 |
| JIS40 | 40 | G1 1/2 | 64 | 12 | 63 | 26-34 |
| JIS50 | 50 | G2 | 73 | 12 | 76 | 34-44 |
| JIS55 | 55 | G1/2 | 83 | 12 | 95 | 44-50 |
| JIS60 | 60 | G1/2 | 83 | 12 | 95 | 50-56 |
| JIS70 | 70 | G3 | 102 | 15 | 112 | 56-66 |
| JIS80 | 80 | G1/2 | 114 | 15 | 128 | 66-76 |
| JIS90 | 90 | G4 | 132 | 17 | 144 | 76-86 |
| JIS100 | 100 | G1/2 | 146 | 17 | 158 | 86-96 |