


尼龙电缆防水接头 (A+B型)

Nylon Cable Glands (A+B-Type)

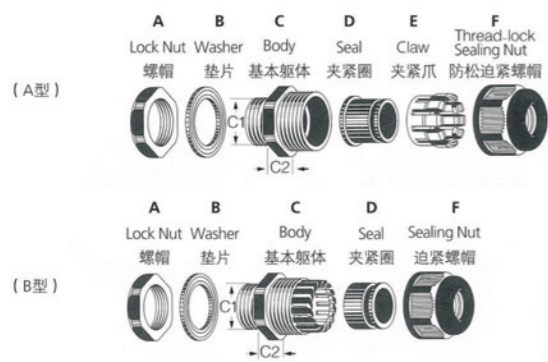

螺牙规格: PG牙, 符合欧盟规范。
产品材质: A.C.E.F部分采用UL认可之你尼龙PA66制成 (防火等级UL94V-2)。B及D部分采用标准EPDM户外耐候橡胶。(其他用途橡胶可接受定制)
保护等级: IP68-10
工作温度: 静态-40°C至100°C, 或瞬间可耐热至120°C; 动态-20°C至80°C, 或瞬间可耐热至100°C。

产品特性: 精美外观的外型设计, 以及特殊A型设计的加紧圈与加紧爪, 夹紧电缆范围大, 其电线固拉特强, 气密性完美, 并可防水、防尘、抗盐、耐弱酸、酒精、油脂及一般溶剂。

颜色种类: 黑色、灰色, 其它颜色可定做。

Thread: PG, EU standard

Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A.C.E.F parts; EPDM rubber for B.D parts

Protection degree: IP68

Working temperature: -40°C to 100°C


Features: Exquisite and beautiful exterior design. The claws and seals of excellent design. Sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Color: Black and gray (Special colors customizable)

夹紧圈形状 Seal Holes	螺牙规格 Thread	规格 Sizes	适用电缆 Cable Range	螺纹外径 Thread O.D.C1	机板口径 Panel Mounting Hole	螺纹长度 Thread Length C2	扳手径 Spanner Size A&I	包装 Std. Pkg. pcs
A型	PG7	PGA7-05	5.3-3	12.5	12.5-12.8	8.5	17/19	50
		PGA7-08	7.8-4.5	12.5	12.5-12.8	8.5	17/19	50
		PGA9-05	5.3-3	15.2	15.2-15.5	9	22/19	50
	PG9	PGA9-08	7.8-4.5	15.2	15.2-15.5	9	22/19	50
		PGA9L-10	10.2-6	15.2	15.2-15.5	10	22/22	50
		PGA11-06	7-4	18.6	18.6-18.9	10	24/22	50
	PG11	PGA11-10	10-6	18.6	18.6-18.9	10	24/22	50
		PGA11L-14	14-9	18.6	18.6-18.9	10	24/27	50
		PGA13.5-11	12-7	20.4	20.4-20.7	10	27/24	50
	PG13.5	PGA13.5L-14	14-9	20.4	20.4-20.7	10	27/27	50
		PGA16-10	11-7	22.5	22.5-22.8	11	30/27	50
		PGA16L-14	14-9	22.5	22.5-22.8	11	30/27	50
	PG16	PGA16L-16	16-12	22.5	22.5-22.8	10	30/33	50
		PGA21-16	16-12	28.3	28.3-28.7	12.5	36/33	50
		PGA21-18	18-14	28.3	28.3-28.7	12.5	36/33	50
	PG21	PGA21L-19	19.5-14.5	28.3	28.3-28.7	12	36/39	50
		PGA29-22	22-16	37	37-37.4	12	46/42	10
		PGA29-25	25-18	37	37-37.4	12	46/42	10
PG29	PGA29L-27	27-22	37	37-37.4	12	46/45	10	
	PGA36-25	25-21	47	47-47.4	15	57/52	10	
	PGA36-30	30-24	47	47-47.4	15	57/52	10	
PG48	PGA48-46	46-40	59.3	59.3-59.7	16	70/78	10	
	PGA48-49	51-44	59.3	59.3-59.7	16	70/78	10	
	PGB7-05	5.5-3	12.5	12.5-12.8	8	17/15	50	
PG7	PGB7-07	6.8-4	12.5	12.5-12.8	8	17/15	50	
	PGB9-05	5.5-3	15.2	15.2-15.5	8.5	22/19	50	
	PGB9-09	8-4.5	15.2	15.2-15.5	8.5	22/19	50	
PG9	PGB11-07	7-4	18.6	18.6-18.9	9	24/22	50	
	PGB11-10	10.4-6.4	18.6	18.6-18.9	9	24/22	50	
	PGB13.5-08	9-5	20.4	20.4-20.7	10	27/24	50	
PG11	PGB13.5-12	12.5-7	20.4	20.4-20.7	10	27/24	50	
	PGB16-10	11-7	22.5	22.5-22.8	10	30/27	50	
	PGB16-14	14-8.5	22.5	22.5-22.8	10	30/27	50	
PG16	PGB21-16	16-12	28.3	28.3-28.7	12	36/33	50	
	PGB21-18	18-14	28.3	28.3-28.7	12	36/33	50	
	PGB29-22	22-16	37	37-37.4	15	46/42	10	
PG21	PGB29-25	25-18	37	37-37.4	15	46/42	10	
	PGB36-25	26.5-21	47	47-47.4	15	57/52	10	
	PGB36-30	32-24	47	47-47.4	15	57/52	10	
PG36	PGB42-32	32-26	54	54-54.4	15.5	64/62	10	
	PGB42-39	41-31	54	54-54.4	15.5	64/62	10	
	PGB48-38	38-30	59.3	59.3-59.7	15.5	70/65	10	
PG48	PGB48-45	45-35	59.3	59.3-59.7	15.5	70/65	10	

尼龙电缆防水接头 (A型)

Nylon Cable Glands (A-Type)

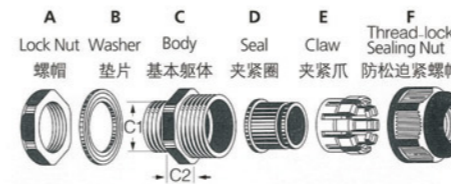

螺牙规格: 公制牙 (Metric), 符合欧盟规范
产品材质: A.C.E.F部分采用UL认可之你尼龙PA66制成 (防火等级UL94V-2)。B及D部分采用标准EPDM户外耐候橡胶。(其他用途橡胶可接受定制)
保护等级: IP68-10

工作温度: 静态-40°C至100°C, 或瞬间可耐热至120°C; 动态-20°C至80°C, 或瞬间可耐热至100°C。

产品特性: 精美外观的外型设计, 以及特殊A型设计的加紧圈与加紧爪, 夹紧电缆范围大, 其电线固拉特强, 气密性完美, 并可防水、防尘、抗盐、耐弱酸、酒精、油脂及一般溶剂。

颜色种类: 黑色、灰色, 其它颜色可定做。

Thread: Metric, EU standard

Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A.C.E.F parts; EPDM rubber for B.D parts

Protection degree: IP68

Working temperature: -40°C to 100°C

Features: Exquisite and beautiful exterior design. The claws and seals of excellent design. Sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Color: Black and gray

(Special colors customizable)

夹紧圈形状 Seal Holes	螺牙规格 Thread	规格 Sizes	适用电缆 Cable Range	螺纹外径 Thread O.D.C1	机板口径 Panel Mounting Hole	螺纹长度 Thread Length C2	扳手径 Spanner Size A&I	包装 Std. Pkg. pcs
短螺纹	M16X1.5	MG16AS-05	5.3-3	16	16-16.3	10	22/19	50
		MG16AS-08	7.8-4.5	16	16-16.3	10	22/19	50
		MG16A-10-ST	10-6	16	16-16.3	10	22/22	50
	M20X1.5	MG16AL-11-ST	11-7	16	16-16.3	10	22/27	50
		MG20AS-06	7-4	20	20-20.3	10	24/22	50
		MG20AS-10	10-6	20	20-20.3	10	24/22	50
	M25X1.5	MG20A-10-ST	11-7	20	20-20.3	10	27/27	50
		MG20A-14-ST	14-9	20	20-20.3	10	27/27	50
		MG20AL-15-ST	14.7-11	20	20-20.3	10	27/33	50
	M32X1.5	MG25AS-10	11-7	25	25-25.4	12	33/27	50
		MG25AS-14	14-9	25	25-25.4	12	33/27	50
		MG25A-16-ST	16-12	25	25-25.4	10	33/33	50
	M40X1.5	MG25A-18-ST	18-14	25	25-25.4	10	33/33	50
		MG25AL-19-ST	19-14.5	25	25-25.4	10	33/39	50
		MG32AS-16	16-12	32	32-32.4	12	41/33	10
	M50X1.5	MG32AS-18	18-14	32	32-32.4	12	41/33	10
		MG32A-22-ST	22-16	32	32-32.4	11	41/42	10
		MG32A-25-ST	25-18	32	32-32.4	11	41/42	10
M63X1.5	MG32AL-26	26.3-21.5	32	32-32.4	10	41/45	10	
	MG40A-25-ST	25-21	40	40-40.4	12	50/52	10	
	MG40A-30-ST	30-24	40	40-40.4	12	50/52	10	
长螺纹	M12X1.5	MG50A-32-ST	32-26	50	50-50.4	15	62/62	10
		MG50A-39-ST	41-31	50	50-50.4	15	62/62	10
		MG63A-46-ST	46-40	63	63-63.4	15	75/78	10
M16X1.5	MG63A-49-ST	51-44	63	63-63.4	15	75/78	10	
	MG12A-05	5.3-3	12	12-12.3	9	18/19	50	
	MG12A-08	7.8-4.5	12	12-12.3	9	18/19	50	
M20X1.5	MG16A-06	7-4	16	16-16.3	15	22/22	50	
	MG16A-10	10-6	16	16-16.3	15	22/22	50	
	MG16AL-11	11-7	16	16-16.3	15	22/27	50	
M25X1.5	MG20AM-08	8.8-5	20	20-20.3	15	24/24	50	
	MG20A-10	11-7	20	20-20.3	15	27/27	50	
	MG20AM-11	12-7	20	20-20.3	15	24/24	50	
M32X1.5	MG20A-14	14-9	20	20-20.3	15	27/27	50	
	MG20AL-15	14.7-11	20	20-20.3	15	27/33	50	
	MG25A-16	16-12	25	25-25.4	15	33/33	50	
M40X1.5	MG25A-18	18-14	25	25-25.4	15	33/33	50	
	MG25A-19	19-14.5	25	25-25.4	15	33/39	50	
	MG32A-22	22-16	32	32-32.4	15	41/42	10	
M50X1.5	MG32A-25	25-18	32	32-32.4	15	41/42	10	
	MG32AL-26	26.3-21.5	32	32-32.4	15	41/45	10	
	MG40A-25	25-21	40	40-40.4	20	50/52	10	
M63X1.5	MG40A-30	30-24	40	40-40.4	20	50/52	10	
	MG50A-32	32-26	50	50-50.4	22	62/62	10	
	MG50A-39	41-31	50	50-50.4	22	62/62	10	
M75X2	MG63A-46	46-40	63	63-63.4	25	75/78	10	
	MG63A-49	51-44	63	63-63.4	25	75/78	10	
	MG75A-56	56-50	75	75-75.6	25	92/92	2	
M90X2	MG75A-66	66-56	75	75-75.6	25	92/92	2	
	MG90A-68	68-68	90	90-91	25	110/110	2	
	MG90A-77	77-66	90	90-91	25	110/110	2	